
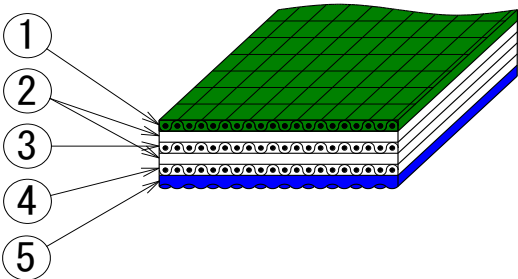


Technical Data Sheet PS-089		<i>PolySprint™</i> FZ-5E12																										
Applications		<ul style="list-style-type: none"> • Bookbinding machine • Printing machine 																										
Item		Description		Remarks																								
Specification Construction				①NBR coating fabric (NBR coating,Green) ②TPE ③PES fabric ④Special PA fabric ⑤NBR (Textured surface,Blue)																								
Dimensions		<table border="1"> <tr> <td>Antistatic</td> <td>Yes</td> </tr> <tr> <td>Width</td> <td>10~500 [mm]</td> </tr> <tr> <td>Length</td> <td>400~100,000 [mm]</td> </tr> <tr> <td>Thickness</td> <td>1.25 [mm]</td> </tr> <tr> <td>Joint</td> <td>Finger Joint (standard dimension: 10W * 30L)</td> </tr> </table>				Antistatic	Yes	Width	10~500 [mm]	Length	400~100,000 [mm]	Thickness	1.25 [mm]	Joint	Finger Joint (standard dimension: 10W * 30L)													
Antistatic	Yes																											
Width	10~500 [mm]																											
Length	400~100,000 [mm]																											
Thickness	1.25 [mm]																											
Joint	Finger Joint (standard dimension: 10W * 30L)																											
Properties		<table border="1"> <tr> <td>Tensile strength</td> <td>90 [N/mm]</td> <td rowspan="2">Test speed: 50mm/min Ambient condition: 23°C,50%R.H.</td> </tr> <tr> <td>Elongation at break</td> <td>13 [%]</td> </tr> <tr> <td>Standard elongation</td> <td>1 [%]</td> <td></td> </tr> <tr> <td>Tension at 1 [%]</td> <td>5 [N/mm] (after 200hours running-in)</td> <td>Ambient condition: 23°C,50%R.H.</td> </tr> <tr> <td>Minimum pulley dia.</td> <td>φ35 [mm]</td> <td></td> </tr> <tr> <td>Operating temp.</td> <td>-20 to +60 [°C]</td> <td></td> </tr> <tr> <td>Coefficient of friction</td> <td>0.6 to 0.7(Paper) Green side 0.5 to 0.6(Steel) Blue side</td> <td>Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.</td> </tr> <tr> <td>Mass</td> <td>1.2 [kg/m²]</td> <td></td> </tr> </table>				Tensile strength	90 [N/mm]	Test speed: 50mm/min Ambient condition: 23°C,50%R.H.	Elongation at break	13 [%]	Standard elongation	1 [%]		Tension at 1 [%]	5 [N/mm] (after 200hours running-in)	Ambient condition: 23°C,50%R.H.	Minimum pulley dia.	φ35 [mm]		Operating temp.	-20 to +60 [°C]		Coefficient of friction	0.6 to 0.7(Paper) Green side 0.5 to 0.6(Steel) Blue side	Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.	Mass	1.2 [kg/m ²]	
Tensile strength	90 [N/mm]	Test speed: 50mm/min Ambient condition: 23°C,50%R.H.																										
Elongation at break	13 [%]																											
Standard elongation	1 [%]																											
Tension at 1 [%]	5 [N/mm] (after 200hours running-in)	Ambient condition: 23°C,50%R.H.																										
Minimum pulley dia.	φ35 [mm]																											
Operating temp.	-20 to +60 [°C]																											
Coefficient of friction	0.6 to 0.7(Paper) Green side 0.5 to 0.6(Steel) Blue side	Measurement condition: 7kPa, 1mm/s Ambient condition: 23°C,50%R.H.																										
Mass	1.2 [kg/m ²]																											
Features																												